


Delock Module MiniPCle I/O PCle full size 2 x Serial RS-422 / 485 with 600 W Surge

Descrizione

This MiniPCle adapter by Delock expands your system by two additional serial ports, which you can lead out through the slot bracket. You can connect different serial devices to this adapter.

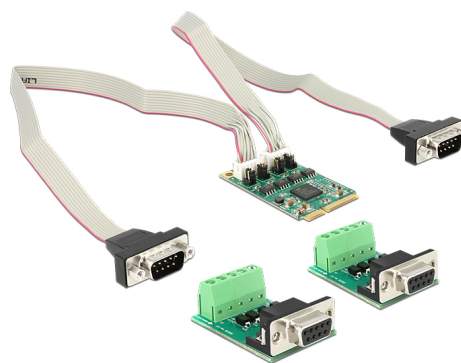

Articolo n. 95245

EAN: 4043619952458

Paese di origine: Taiwan,
Republic of China

Pacchetto: Box

Specifiche

- Connector:
on the module:
2 x 10 pin header male
on the slot bracket (standard): 1 x
2 x serial RS-422 / 485 DB9 male with screw nuts
or on slot bracket (low profile): 2 x
1 x serial RS-422 / 485 DB9 male with screw nuts
- Chipset: Exar XR17V352, SP3078E
- Form factor: miniPCle full size
- Interface: PCI Express revision 2.0
- Data transfer rate up to 921.6 Kb/s
- Compatible with 16C550 UART
- 600 W surge
- Cable length: ca. 30 cm (incl. connector)


Requisiti di sistema

- Windows Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/11, Linux Kernel 2.6
- Mainboard with a free miniPCle slot with a PCIe interface

Contenuto della confezione

- MiniPCle module
- 2 x serial connection cable (pin header > DB9)
- 2 x terminal block adapter
- 1 x standart slot bracket with two DB9 ports
- 2 x low profile slot bracket with one DB9 ports
- Driver CD
- User manual

Immagini

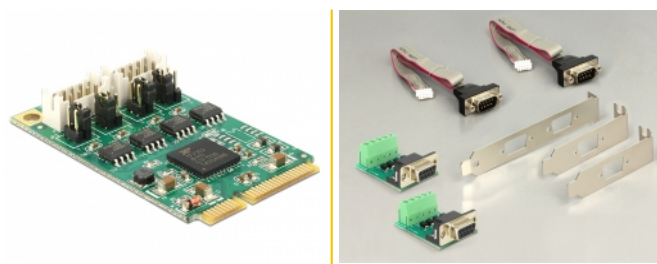

General

Fattore di forma:	Mini PCIe versione intera
Supported operating system:	Linux Kernel 2.6 o superiore Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Protection:	ESD (Electrostatic Discharge) 600 W impulso di picco

Interface

Connettore 1:	1 x Mini PCI Express, Rev. 2.0
Connettore 2:	2 x RS-422 / RS-485

Technical characteristics

Data flow control:	Automatically
Chipset:	Exar 17V352
Data transfer rate:	RS-422 / RS-485 up to 1 Mbps 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 10000, 14400, 19200, 25000, 38400, 50000, 57600, 100000, 115200, 128000, 200000, 230400, 250000, 460800, 500000, 921600 and more
FIFO:	4 x 256 Byte
Jumper:	4 x
Storage temperature:	-40 °C ~ 85 °C
Temperatura di esercizio:	-30 °C ~ 75 °C
Humidity:	5 ~ 90 %

Data transmission:	asynchronous Half duplex full duplex differential
UART:	16C550
Data bits:	5, 6, 7, 8
Stop bits:	1, 1.5, 2
Terminator:	4 x RS-422 / 485 (On / Off)

Physical characteristics

Cable length incl. connector:	30 cm
-------------------------------	-------