

# Delock Riser Card PCI Express x1 to 3 x PCIe x1 with 50 cm USB cable


## Description

The PCI Express riser card by Delock can be plugged into any **PCI Express x1** slot on the motherboard. The PCI Express board can be mounted in a different position in the case. This allows **up to three PCIe cards** to be operated in each PCIe slot of a motherboard.

### Crypto mining and resource sharing

The computing power of up to three graphics cards can be used on one PCI Express x1 slot.

In this way, the computing power of the graphics cards for research projects such as Folding@Home can be shared via a cloud. Furthermore, the riser card can also be used for mining crypto currencies.

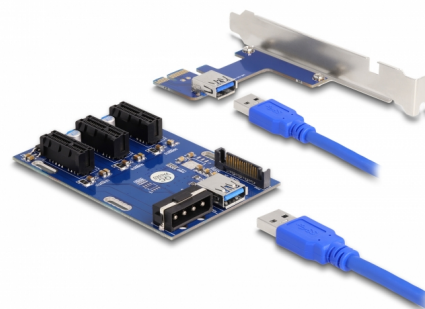

**Item no. 41442**

EAN: 4043619414420

Country of origin: China

Package: Retail Box

## Note

The package content includes a USB 3.0 riser cable with a length of 50 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

## Special features

- Three PCIe x1 graphics cards can be used with a PCIe x1 slot.

## Specification

- Connectors:

Motherboard side:

1 x PCI Express x1

1 x USB 3.0 Type-A female

Riser side:

3 x PCI Express x1 slot

1 x USB 3.0 Type-A female

1 x Molex 4 pin power plug

- 1 x SATA 15 pin power plug
- Chipset: Asmedia ASM1184e
- Data transfer rate up to 800 MB/s
- FP solid capacitors, ensure secure power supply of the graphics card
- 4 x mounting holes on the riser card
- Cable data:
  - 1 x riser cable USB 3.0 Type-A male to male ca. 50 cm (incl. connectors)
  - 1 x power cable 4 pin to SATA ca. 15 cm (incl. connectors)
- Dimensions of the riser card (LxWxH): ca. 99 x 64 x 15 mm

---

## System requirements

- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- Power supply with a free SATA power connector or
- Power supply with a free 4 pin power connector


---

## Package content

- PCIe to USB riser card
- USB to PCIe riser card
- 1 x USB 3.0 cable
- 1 x Power cable
- Mounting material
- User manual

---

## Images



## Interface

Connector 1:	1 x PCI Express x1
Connector 2:	2 x USB Type-A female
connector 3:	3 x PCI Express x1 slot
connector 4:	1 x Molex 4 pin power plug
connector 5:	1 x SATA 15 pin power plug

## Technical characteristics

Chipset:	Asmedia ASM1184e
Data transfer rate:	up to 800 MB/s