

# Delock 3.5" Mobile Rack for 4 x M.2 NVMe SSD with Slim SAS SFF-8654 connector

## Description

This solid metal mobile rack by Delock can be installed into a **3.5" bay** of a PC and provides **four M.2 slots** in 2280, 2260, 2242 or 2230 format.

## Quick change of SSD


Due to the special mechanism, the **SSD can be exchanged quickly and easily**. For example, data backups can be taken and stored in a safe place.

## Tray with key lock and springs

The mobile rack is equipped with a **key lock** to prevent unauthorised access. The stable carrier of metal has springs on the top and bottom which **reduce vibrations** and therefore support its use in mobile devices.

## Note

Special care must be taken that the tray is fully inserted, otherwise no connection to the SSD can be established.

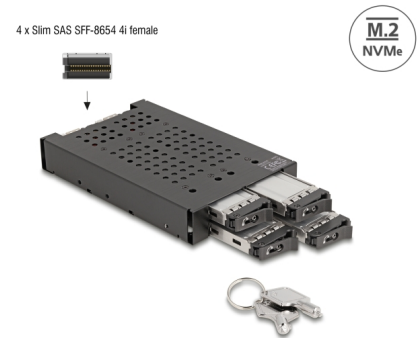

**Item no. 47072**

EAN: 4043619470723

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - Mobile Rack:
  - internal:
  - 4 x M.2 key M slot
  - external:
  - 4 x Slim SAS SFF-8654 4i female
  - 4 x 4 pin Floppy male
  - 4 x 2 pin pin header for fan
  - M.2 tray:
  - 1 x M.2 key M male
  - 1 x M.2 key M slot
- Compatible to PCI Express V4.0

- Interface: PCIe / NVMe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 4 x LED indicator
- Bootable, ex UEFI version 2.3.1
- M.2 tray made of metal
- Supports NVM Express (NVMe)
- Supports S.M.A.R.T.
- Key lock
- Dimensions (LxWxH): ca. 159 x 100 x 25 mm

---

## System requirements

- Linux Kernel 6.2 or above
- Windows 10/10-64/11
- Windows Server 2022
- PC with one free 3.5" bay
- A free Slim SAS SFF-8654 port for each M.2 slot
- Power supply with a free SATA power connector

---

## Package content

- 3.5" Mobile Rack with 4 x M.2 tray
- 2 x cable SATA 15 pin to 2 x 4 pin Floppy female, length ca. 12 cm
- 2 x keys
- 4 x screw I 6.0 x 5.0 mm, head 8.0 mm
- 4 x screw IM 2.0 x 4.0 mm, head 5.0 mm
- User manual

## Images



## General

Form factor:	3.5"
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022 Linux Kernel 6.2 or above

## Interface

External:	4 x Slim SAS SFF-8654 4i female 4 x 4 pin Floppy male 4 x 2 pin pin header for fan
Internal:	4 x M.2 key M slot

## Physical characteristics

Housing material:	metal
-------------------	-------

## Herstellerinformation

---

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de