


Delock 2.5" Converter U.2 SFF-8639 > M.2 NVMe Key M

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. The converter can be installed into your system internally through the U.2 68 pin interface.

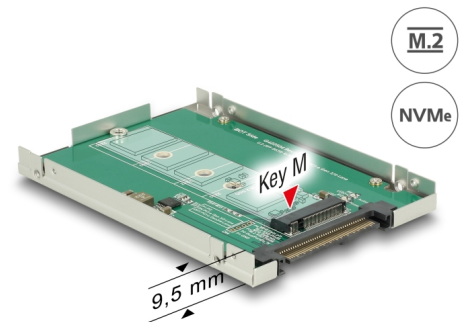

Item no. 62710

EAN: 4043619627103

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x U.2 SFF-8639 male >
 - 1 x 67 pin M.2 key M slot
- Interface: PCIe (2 or 4 lanes)
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Supports NVM Express (NVMe)
- Power consumption: max. 13.2 W
- Short circuit protection, in-rush current suppression, over heating protection
- Dimensions (LxWxH): ca. 100 x 65 x 9.5 mm

System requirements


- Linux Kernel 3.16 or above

- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- A free U.2 SFF-8639 interface or
- A free SFF-8643 interface

Package content

- Converter
- 2.5" enclosure
- 1 x fixing screw for M.2 module
- 1 x thermal pad
- User manual

Images

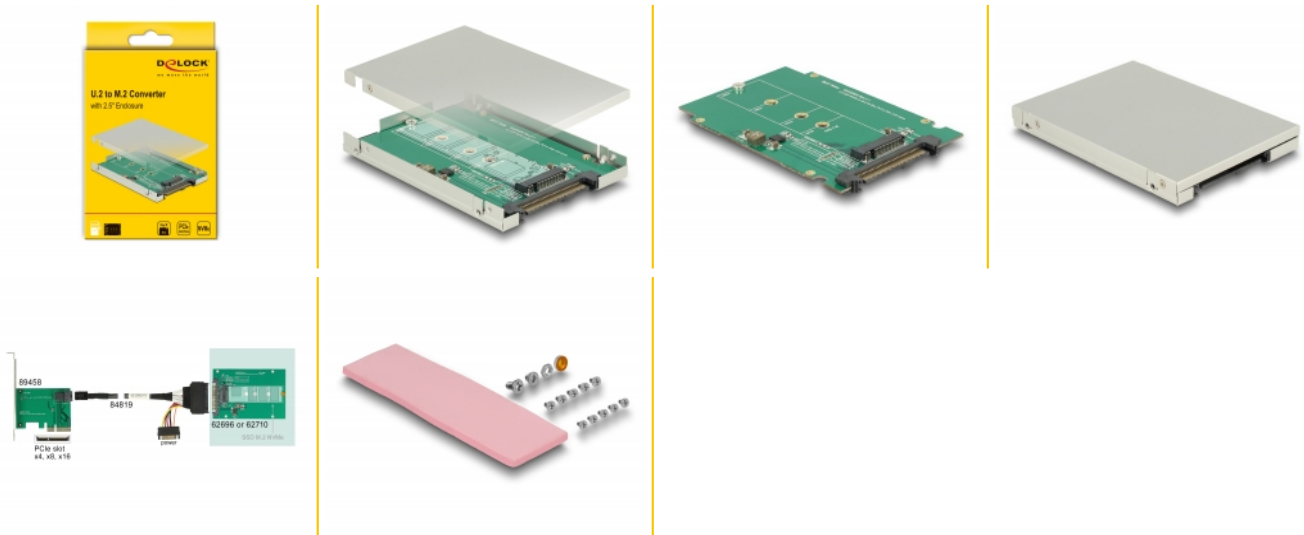

General

Form factor:	2.5"
Supported operating system:	Linux Kernel 3.16 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	power and activity
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x M.2 NGFF based on PCIe
Connector 2:	1 x U.2 SFF-8639 male

Technical characteristics

Maximum power consumption:	13.2 W
----------------------------	--------

Physical characteristics

Length:	100 mm
Width:	65 mm
Height:	7 mm

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland

E-Mail	info@delock.de
Webseite	www.delock.de