


# Delock Converter U.2 SFF-8639 NVMe > 1 x M.2 Key M

## Description

This converter by Delock enables the connection of a M.2 PCIe SSD in 22110, 2280, 2260, 2242 and 2230 format. The converter can be installed into your system internally through the U.2 interface.

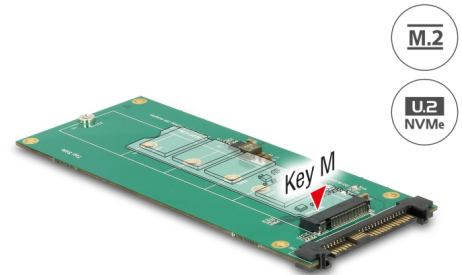

**Item no. 62865**

EAN: 4043619628650

Country of origin: Taiwan,  
Republic of China

Package: Box

## Technical details

- Connectors:
  - 1 x U.2 SFF-8639 male
  - 1 x 67 pin M.2 key M slot
- Interface: PCIe (2 or 4 lanes)
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Bootable
- Supports NVM Express (NVMe)
- Maximum output current: 4 A
- Over current protection, over heating protection, short circuit protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 130 x 52 x 6 mm

## System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- A free U.2 SFF-8639 interface



---

## Package content

- Converter
- Mounting material
- User manual

---

## Images



## General

Function:	Bootable, ex UEFI 2.3.1 NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.3 or above Linux Kernel 4.x or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	power and activity
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection Overcharge protection

## Interface

Connector 1:	1 x U.2 SFF-8639 male
Connector 2:	1 x 67 pin M.2 key M slot

## Physical characteristics

Length:	130 mm
Width:	52 mm
Height:	6 mm