


Delock Converter M.2 Key A+E male > 1 x Serial RS-232 male

Description

This converter by Delock expands the system by one serial RS-232 port.

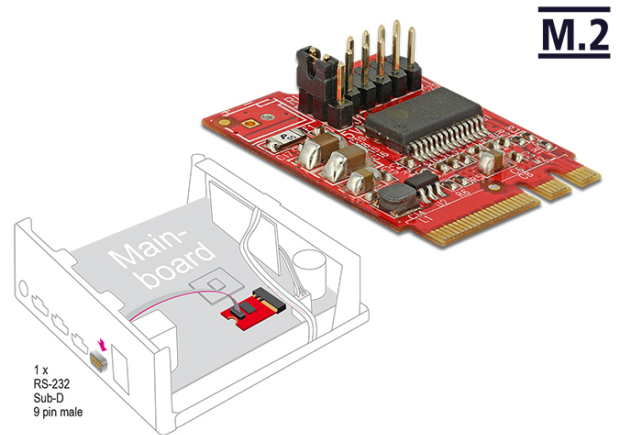

Specification

- Connectors:
1 x 59 pin M.2 key A+E male >
1 x 10 pin pin header
1 x serial RS-232 Sub-D 9 pin male with nuts on cable
- Chipset: Prolific PL2303
- Interface: USB
- Jumper setting RI or 5 V on pin 9
- Form factor: M.2 2230
- Suitable for M.2 slot with key A or key E based on USB
- Data transfer rate up to 230.4 Kb/s
- Compatible with 16C550 UART
- Dimensions (LxWxH): ca. 30 x 22 x 8 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38 / Kernel 4.9.2
- One free M.2 key A or key E slot

Package content

- Converter
- 1 x RS-232 connection cable, length ca. 25 cm
- 1 x fixing screw
- User manual

Item no. 62951



EAN: 4043619629510

Country of origin: Taiwan, Republic of China

Package: • Retail Box



Images



General	
Form factor:	M.2 2230
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 2.6.38 or above
Slot:	USB
Interface	
Connector 1:	1 x 59 pin M.2 key A+E male
Connector 2:	1 x Serial RS-232 DB9 male
connector 3:	1 x 10 pin pin header
Technical characteristics	
Chipset:	Prolific PL2303
Data transfer rate:	up to 230.4 Kb/s
Physical characteristics	
Length:	30 mm
Width:	22 mm
Height:	8 mm