


# Delock PCI Card > 2 x Serial RS-232 High Speed 921K with Voltage supply

## Description

The Delock PCI card expands your system by two High Speed RS-232 ports. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

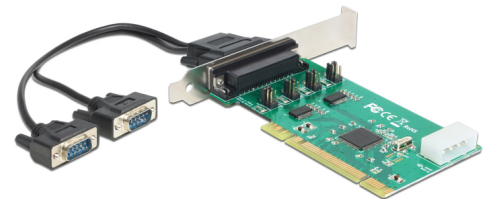

**Item no. 89327**

EAN: 4043619893270

Country of origin: Taiwan,  
Republic of China

Package: Box

## Specification

- Chipset: Systembase SB16C1052PCI
- Connector:
  - external:
    - 1 x D-Sub 25 Pin female
    - connecting cable: D-Sub 25 pin male > 2 x Serial RS-232
    - D-Sub 9 pin male
  - internal: 1 x PCI
  - 1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V or RI of pin 9
- Further voltage supply 5 V / 12 V of pin 1, depending on connected device

- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- Bus: universal 32/64 Bit 3.3/5 V PCI version 2.1, 2.2, 2.3 and PCI-X
- I/O address and IRQ assigned by the system

---

## System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64, Linux ex Kernel 2.6
- PC with a free PCI slot
- Power supply with a free Molex power connector

---

## Package content

- PCI card
- Low profile bracket
- 1 serial connecting cable (ca. 30 cm)
- Driver CD
- User manual

---

## Images

