


# Delock PCI Express x4 Card to 2 x internal USB 3.2 Gen 2 key A 20 pin female

## Description

This PCI Express card by Delock expands the PC by **two internal USB 3.2 key A 20 pin female ports**. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

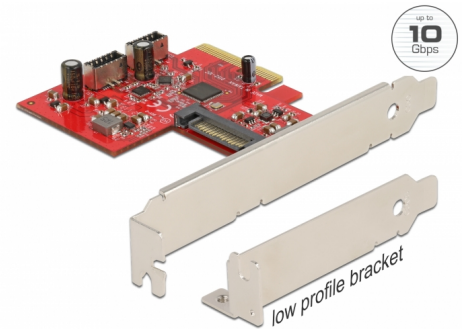

**Item no. 90058**

EAN: 4043619900589

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Specification

- Connectors:  
internal:  
2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female  
1 x SATA 15 pin power plug  
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:  
SuperSpeed USB 10 Gbps,  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

## System requirements

- Linux Kernel 5.8 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

---

## Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

---

## Images



## General

Supported operating system:	Linux Kernel 5.8.0 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

## Interface

Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power plug 2 x USB 10 Gbps key A 20 pin female
-----------	---

## Technical characteristics

Chipset:	Asmedia ASM3142
----------	-----------------

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------