


Delock USB 2.0 Camera Module 1.92 Megapixel 48° Fix Focus (relaunch of item no. 95852)

Description

The Delock USB 2.0 camera module offers in compact construction low power consumption as well as high resolution. It is ideal for installation in industry components like IPCs, sensors, notebooks or PDAs.

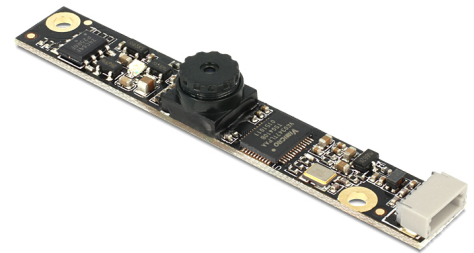

Item no. 95956

EAN: 4043619959563

Country of origin: China

Package: Poly bag

Specification

- USB 2.0 High Speed
- 1.92 megapixel
- With optical IR filter
- Status indication with LED
- UXGA 1600x1200, 15 fps
- HD ready 1280 x 720 p, 30 fps
- SVGA 800 x 600, 30 fps
- QVGA 320 x 280, 60 fps
- Lens: F/2.8
- Fix focus: 20 cm ~ infinite
- Automatic exposure control + white balance (disengageable)
- Format: YUY2, RGB24, I420
- Standard USB video class device UVC
- Windows Vista/ 7/ 8/ 10, Linux 2.6.15
- Mac OS 10.4.8; P4 1,4 128MB
- Voltage: 5 V DC USB
- Elektrical power: 600 mW
- Dimension (LxWxH): ca. 60.00 x 9.00 x 6.26 mm

System requirements

- Windows Vista/ 7/ 8/ 10,
- MS DirectX 9.0c and above
- Linux 2.6.15 and above with Video4Linux
- Mac OS 10.4.8 and above
- Minimum P4 1.4 GHz, 512 MB RAM

Package content

- Camera module

Images

